

RS900 - RS900S


STANDARD LINE

FEATURES

- Arm, column and carriage in cast iron.
- Interchangeable steel slide-ways.
- Carriage with 8 bearings.
- Extraordinary arm rigidity for maximum cutting precision.
- Total operator safety.
- Blade not included

STANDARD EQUIPMENT

- Motor protection switch with release coil.
- Motor brake.
- Spring-operated carriage return.
- Mechanical end-stop.
- Emergency push button.

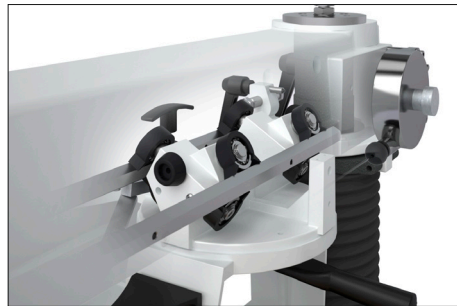

Motor assembly tilted by 45°.

Carriage with 8 bearings with interchangeable slide-ways.

TECHNICAL CHARACTERISTICS		RS900	RS900S
Item code		ZM009	ZM010
Three-phase motor	HP	4	5.5
Three-phase motor	kW	3	4
Motor revs	RPM	2800	2800
Blade diameter	mm.	350	400
Motor arbor	mm.	30	30
Cross cutting capacity with 20 mm thickness	mm.	890	900
Cross-cut capacity at 45°	mm.	560	570
Depth of cut	mm.	100	120
Depth of cut with motor at 45°	mm.	65	83
Miter locating stops		0 +45° -45°	
Bevel locating stops		0 -45°	
Carriage bearings	no.	8	8
Net weight	Kg.	285	300