

# TR500 - TR501

## PNEUMATIC

### STANDARD EQUIPMENT


- Pneumatic operation of saw assembly.
- Motor brake.
- Two-handed control for operator safety.
- CE electrical system.
- Adjustable blade ascent speed.
- Safety grill in the cutting zone (TR500 only).
- Widia blade.
- 1m work surface to the right of the blade.
- 1m work surface to the left of the blade.



TR501



TR500

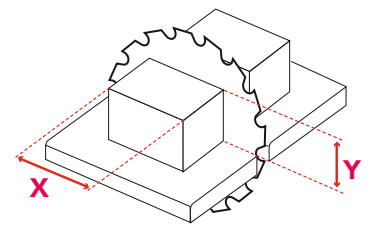

TR500 - TR501

X	Y
360 mm	60 mm
325 mm	100 mm
300 mm	115 mm
250 mm	135 mm

TECHNICAL CHARACTERISTICS		TR500	TR501
Item code		ZM029	ZM365
Three-phase motor	HP	10	10
Three-phase motor	kW	7.5	7.5
Motor revs	RPM	3000	3000
Blade diameter	mm.	500	500
Motor arbor	mm.	30	30
Maximum operating pressure	bar	8	8
Material loading		from the side only	from front and side
Net weight	Kg.	415	415